


Border solar modules for M310-60-b GG LEVEL



3337.0291 Swiss Premium M155-6x5-b GG LEVEL

Nominal power (Pmpp)	155 Wp
Nominal voltage (Umpp)	16.4 V
Nominal current (Impp)	9.47 A
Open circuit voltage (Uoc)	19.5 V
Short circuit current (Isc)	9.81 A
Number of cells (matrix)	30 (6x 5)
Dimensions (LxWxH) ±3.0 mm	1100x868x8 mm
Modular dimensions (LxW)	1016x873 mm
Weight	16.7 kg

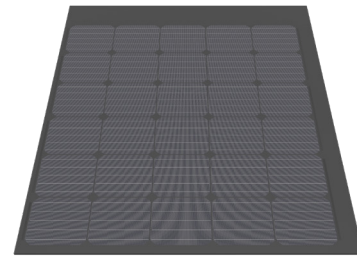


3337.0287 Swiss Premium M155-3x10-b GG LEVEL

Nominal power (Pmpp)	155 Wp
Nominal voltage (Umpp)	16.4 V
Nominal current (Impp)	9.47 A
Open circuit voltage (Uoc)	19.5 V
Short circuit current (Isc)	9.81 A
Number of cells (matrix)	30 (3x 10)
Dimensions (LxWxH) ±3.0 mm	620x1695x8 mm
Modular dimensions (LxW)	536x1700 mm
Weight	18.4 kg

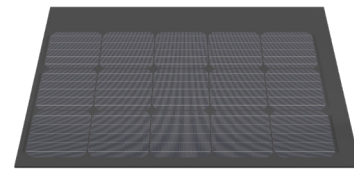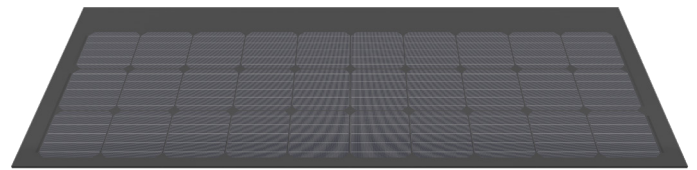

3337.0295 Swiss Premium M77-3x5-b GG LEVEL

Nominal power (Pmpp)	77 Wp
Nominal voltage (Umpp)	8.2 V
Nominal current (Impp)	9.47 A
Open circuit voltage (Uoc)	9.7 V
Short circuit current (Isc)	9.81 A
Number of cells (matrix)	15 (3x 5)
Dimensions (LxWxH) ±3.0 mm	620x868x8 mm
Modular dimensions (LxW)	536x873 mm
Weight	9.4 kg

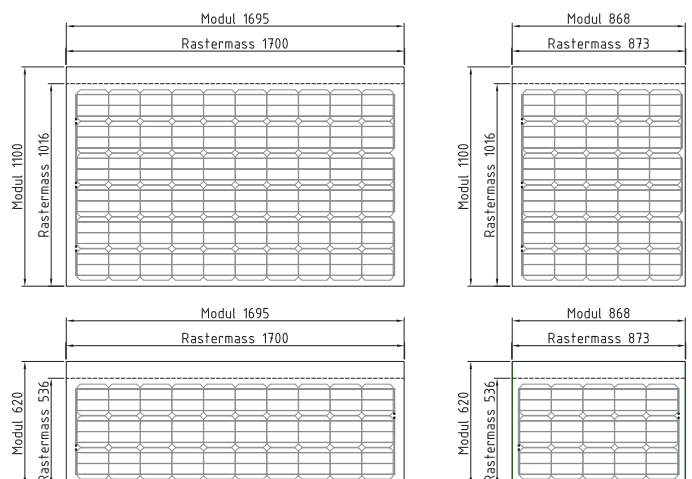

Product variants Junction box on the left (viewed from above)

3337.0421 Swiss Premium M155-6x5-b GG LEVEL Jbox L

3337.0417 Swiss Premium M155-3x10-b GG LEVEL Jbox L

3337.0425 Swiss Premium M77-3x5-b GG LEVEL Jbox L

Customized special modules

3337.0251 Special module LEVEL Cat. 1 active / complexity: low

3337.0248 Special module LEVEL Cat. 2 active / complexity: medium

3337.0249 Special module LEVEL Cat. 3 active / complexity: high

3337.0250 Special module LEVEL Cat. 4 passive / complexity: high

Border modules are electrically compatible with the corresponding basic module (60 solar cells). For technical reasons of production, despite utmost care, the surface properties and optical colour effect may vary from the basic module.

STC (Standard Test Conditions): irradiance 1000 W/m², cell temperature 25°C, AM 1.5
Measuring tolerances ±3 % (Pmpp); ±10 % (Umpp, Impp, Uoc, Isc)



Note: The instructions in the installation manual must be strictly complied with. Further information about approved utilization of products can be found in the installation manual or can be requested from the technical service.

E-mail: info@megasol.ch
Hotline: +41 62 919 90 90
www.megasol.ch



Megasol partner

Subject to errors and technical modifications.
© Megasol Energy Ltd | Version: 07/2018