

Easy Installation

Rooftop Photovoltaics

Rooftop and Facade Photovoltaic Systems



RearCon Module Technology **9**
LOCKIN Inlaying system **18**
LAYIN Inlaying system **28**





The Megasol principle

Successful as a team

We managed to retain the start-up spirit: We are young, fast, and incredibly innovative. Today, we are Europe's most successful manufacturer of solar modules. In this context, our customers are the decisive factor because close cooperation and team efforts are what makes the difference for success. We know and appreciate each other. With many of our customers, we are on first-name terms, and lots of them have become our friends. We appreciate frank and open feedback. Many of our product innovations result from exactly suchlike feedback. Our doors and hearts are open to our clients – whether we meet on-site, have raclette together at our Deitingen headquarters or enjoy a drink at one of our tradeshow appearances.

These are our principles:

1

Close contact to our customers, partners and friends

- > Direct contact to all stakeholders
- > Support for layout, sales, and implementation/realisation
- > Installation plans, ballasting plans, string plans
- > Formalities (EIV, ESTI, EEA)
- > On-site installation coaching
- > System trainings, e.g. for inverters

2

Fast and powerful systems

- > Systems with few components that are smartly designed
- > In-house developments focused on short installation times and maximum performance

3

Everything from a single source

- > Solar modules, mounting structures, inverters, generator connection boxes, electric materials
- > Integration of storage solutions, energy management and charging infrastructure for e-mobility
- > Quick provision through our in-house logistics and processing centre
- > Turn-key delivery to the construction site

6 Efficiency

Properties

- HiR cell technology 7
- Glass-glass solar modules 8
- RearCon module technology 9

10 High performance modules

Properties

- > Best price-performance ratio
- > The most efficient cell layout for each application
- > U-frame
- > Swiss warranty
- > Ex stock Deitingen, CH


20 Swiss Premium modules

Properties

- > *Swiss Made*
- > Highest longevity
- > High static load resistance
- > Frameless

30 Roof Connection

Structure

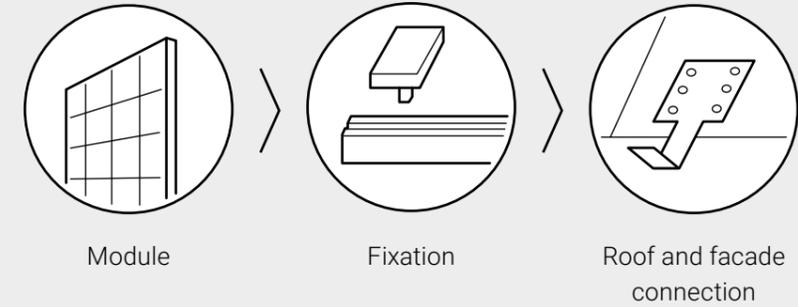


Module types

12

Fixation

- LOCKUP Fixation 14
- LOCKIN Inlaying system 18



Mono HiR white U30b




RearCon Totally Black U30b

Module types


22

Fixation

- LAYUP Fixation 24
- LAYIN Inlaying system 28



Mono HiR black GG3



Mono HiR translucent GG3

Connecting to pitched roofs

30

Connecting to flat roofs


32



Seam metal roof



Fibre cement roof

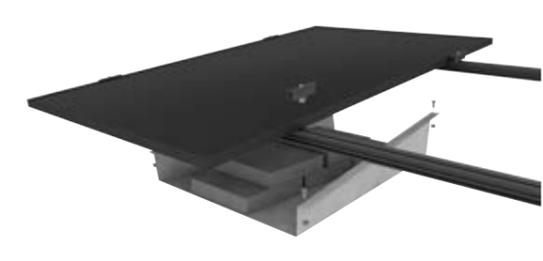

Flatport tray



HiR cell technology

Highest cell efficiency and lifetime thanks to 0% PID & LID

The new proprietary cell technology

HiR (pronounced like the word «higher») is a proprietary cell technology from Megasol. HiR is based on n-type wafers, which for decades have proven to be the highest quality and most stable technology. The n-type HiR technology combines charge carrier selective contacts, so-called ultra-thin tunnel oxides (SiO_2), with a sophisticated multi-stack metallization and a multi-level anti-reflective coating.

The most power-stable modules in the world

N-type HiR solar modules have a much higher power stability compared to conventional PERC modules. n-type HiR modules have a significantly lower power degradation and are completely PID- and LID-free due to their design. This results from the fact that n-type HiR is completely insensitive to boron-oxygen complexes responsible for PID.

In the market, PERC modules with 4-5% power degradation due to PID or LID are also considered «PID-free». However, a 4-5% difference in yield can have a massive impact on the economic profitability of solar plants. n-type HiR modules have 0% PID and 0% LID and are thus the most power-stable modules in the world.

Better economic profitability and higher project yields


- > n-type HiR modules have a very high power output combined with very compact dimensions. More yield per roof area leads to higher economic efficiency and better project yields.
- > An optimal thermal coefficient and better low-light performance lead to more yield per kWp.
- > All HiR modules are bifacial and have a significantly higher bifaciality factor compared to conventional bifacial solar modules (over 90% instead of 70-75%).
- > Considerably lower proportion of grey energy

How it works: simply explained

The ultra-thin tunnel oxide layer reduces recombination losses and thus significantly increases efficiency. The very fine front and rear contact grids guarantee ideal electrical current absorption capability with good solderability and conductivity thanks to their layers that have each been optimised for their respective characteristics. Thanks to the anti-reflective coating, which is not only classically single-layered but multi-layered, the reflection losses on the cell surface are minimised. At the same time, the cell surface appears darker (black), which makes it even more attractive for projects with high aesthetic requirements.

Longer service life and longer warranty periods

- > Glass-glass modules are extremely durable and come with a 15-year Swiss product warranty and a 30-year linear performance warranty.
- > Best wattage prices per warranty year

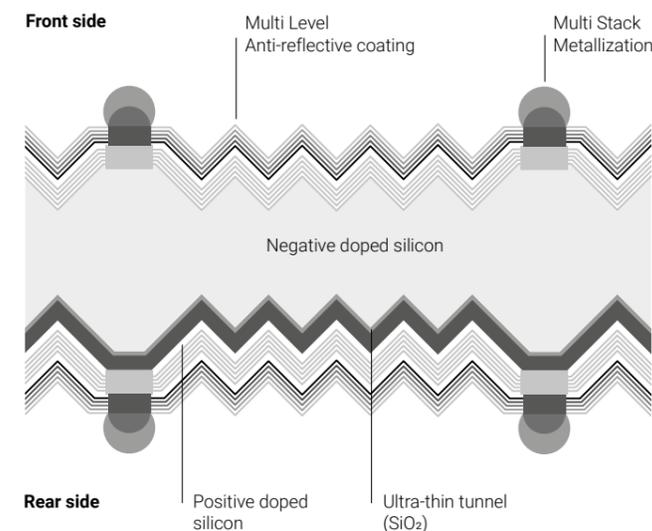

Glass-glass solar modules


Two glass panes are combined into one solar module. They become laminated safety glass and therefore have unique properties.

Areas of application

Applications include facades, railings, in-roof and on-roof applications, infrastructure structures (for example, dams, noise barriers, etc.), open spaces, carports, alpine and desert applications.

Properties

Front and back glass in combination with durable encapsulation material protect the components from vapour penetration. In the «neutral zone» between the panes, the cells remain stress-free (no compression or bending) which reduces the occurrence of so-called micro cracks. This results in a potential lifespan of over 50 years.

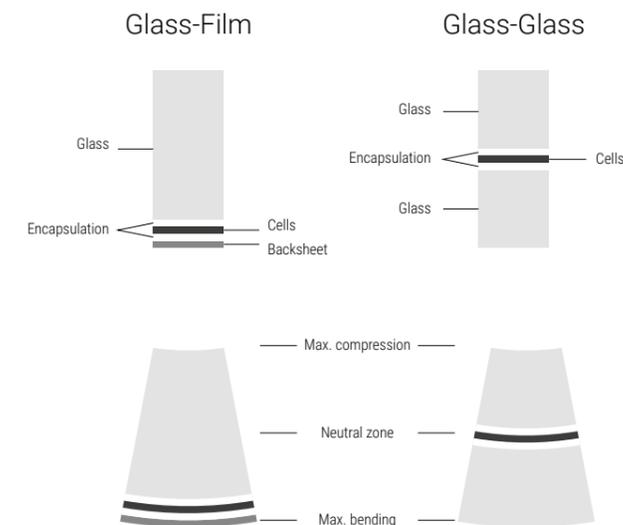

Free design scope, high durability and stability characterise this solar building material. All glass-glass modules can be designed freely. Glass-glass modules are manufactured in Deitingen, Switzerland.

Type of installation

Glass-glass solar modules can be installed both with or without frames. The mounting systems FAST, MATCH, LEVEL, NICER, LOCKUP, LOCKIN, LAYUP and LAYIN are especially suitable for the integration of glass-glass solar modules.

Non-glare solar glass

Particularly anti-glare surface structures are used.

Technical specifications

Megasol Cell technologies: Mono HiR / Mono HiR RearCon

Cell sizes: 156.75 mm (M2) / 158.75 mm (G1) / 166 mm (M6) / 182 mm (M10) / 210 mm (G12)

Cell geometries: Full-square, Half-cut, Triple-cut, Custom

Typical power (Full Black)*: 184-232 Wp/m²

Typical power (colour)*: 150-200 Wp/m²


Encapsulation material: EVA or PVB

Glass thickness per pane: 2-12 mm

Hail protection: Protection class 5 (hailstone size 50 mm)

Fire safety classification: B - s1, d0 according to European fire protection standard EN 13501-1. The building element is considered non-combustible material in terms of cantonal fire insurance.

* The square-metre performance of the module depends on the specific format.

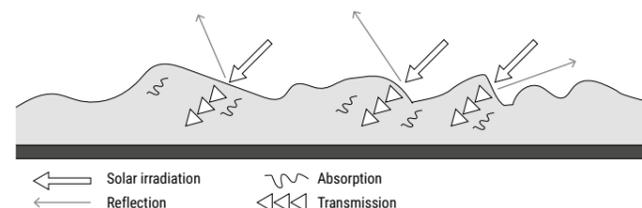

RearCon module technology

Elegant, deep black design, free of visible contacts, 23.2% cell efficiency and 5 world records



Contacts on the rear side


RearCon means «Rear Contact». All contacting that was previously visible has been moved from the front to the back. This technology is a game changer in terms of performance, price, durability and aesthetics.

23.2%: World record in the royal discipline of module efficiency


RearCon solar modules achieve module efficiencies of up to 23.2%. This corresponds to the world record for the most efficient commercially manufactured solar module. RearCon's performance improvements are achieved through the following technological innovations:

- > The elimination of front contacting leads to more active cell area and thus higher efficiency
- > Busbars with particularly high conductivity reduce internal resistances (lower ohmic losses)
- > Gapless modules: Cell spacing of -0.3 mm (instead of conventional +2.0 mm) leads to area savings and higher efficiency

Solar modules without cell spacing

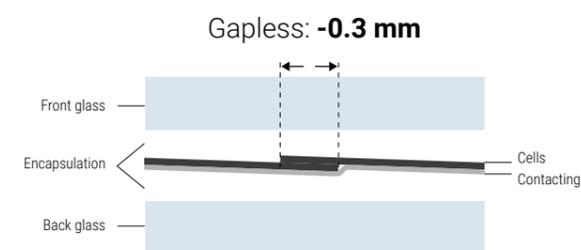

Solar modules with cell spacing

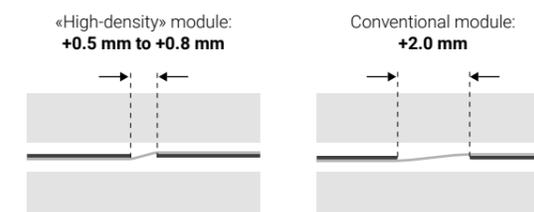

Design and aesthetic integration

The innovations in the area of aesthetics include these key points:

- > The contacts on the front side («pinstripe look») are completely eliminated
- > RearCon modules have black, homogeneous «Totally Black» surfaces
- > The cells overlap slightly («gapless») – the classic «square structure» is avoided

Price superiority

Due to the technology, the production costs for RearCon are considerably lower. RearCon technology requires a significantly lower number of production steps than the production of previously known rear-contacted solar modules. This cost advantage is passed on. RearCon solar modules are therefore at a significantly lower price level than previous rear-contacted solar modules.

Additional world records

RearCon reaches the top of the podium in five other disciplines. The five world records are particularly important in the field of individual solar building envelopes:

- > Most compact «400+ Wp» solar module
- > Most efficient full black solar module (full black surface)
- > Most efficient double-glass solar module (front and rear glass)
- > Most efficient bifacial solar module (power yields from front and rear side)
- > Most efficient 1'500V solar module (advantage especially for large scale projects)

High performance modules

Quick to install, budget-friendly, and highly profitable: our framed high performance modules are extraordinarily durable «workaholics».


Low investment

- > Best market prices
- > Project prices on request




Latest technology

- > Highest efficiency levels (HiR & HiR RearCon)
- > Nano-coated solar glass
- > Optimized low-light performance



Wide product range

- > Power classes
- > Optics (Totally Black, Full Black, white)



Environmentally friendly

- > Made with renewable power
- > Energetic amortisation under 2 years
- > Seamless traceability of all materials



Secure fixation

- > LOCKUP module fixation
- > Compact dimensions
- > Low weight thanks to thin glass (2 x 2 mm)

20

Wide range of applications

- > The most efficient cell layout for each application
- > Bifacial glass-glass

Swiss warranty

- > 30 years linear performance warranty
- > 15 years product warranty
- > Produced at the Megasol plant in Ningbo



Framed module | 13

LOCKUP fixation | 20

Module types

Technical specifications

Laminate structure: Glass-glass

Megasol Cell technologies: Mono HiR / Mono HiR RearCon

Cell size: 158.75mm (G1) / 166mm (M6) / 182mm (M10) / 210mm (G12)

Cell geometry: Full-square / Half-cut / Triple-cut

Frame: U-frame, aluminium, anodized natural or black

Front side: 2 mm TVG, high-transmission, nano-finished, antireflective

Back side: 2 mm TVG

Swiss warranty

Product warranty: 15 years


Linear performance warranty: 30 years

Suitable mounting systems

- > LOCKUP Fixation 14
- > LOCKIN Inlaying system 18

Bifacial: power from reflections


- > Double sided active cells
- > Additional yields depend on the installation situation and the albedo (reflectivity) of the substrate

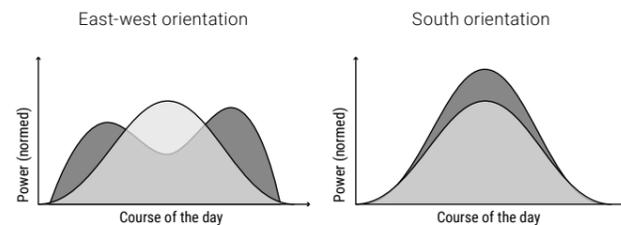

In east-west orientations, the rear produces most when the sun is flat. South facing bifacial plants generate their additional yield classically during the midday hours.

Potential bifacial gain

Low reflecting surface (e.g. grass, brick)	5-15%
Well reflecting surface (e.g. sand, bright gravel or paint)	15-25%
Highly reflecting surface (e.g. ice, snow)	25-35%



Framed high performance modules




HiR RearCon Bifacial M6 HC120 | Totally Black
Cell type: n-type HiR M6 (166 mm)
Matrix: 120 half-cut cells
Frame: U30 black




HiR RearCon Bifacial M6 HC144 | Totally Black
Cell type: n-type HiR M6 (166 mm)
Matrix: 144 half-cut cells
Frame: U30 black



Mono HiR Bifacial HC120 G1 | Full Black optics
Cell type: n-type HiR G1 (158.75 mm)
Matrix: 120 half-cut cells
Frame: U30 black

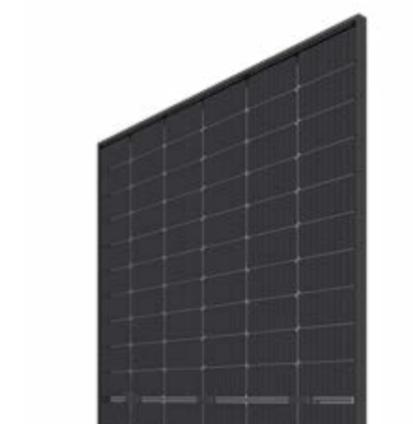


Mono HiR Bifacial HC120 M6 | Full Black optics
Cell type: n-type HiR M6 (166 mm)
Matrix: 120 half-cut cells
Frame: U30 black

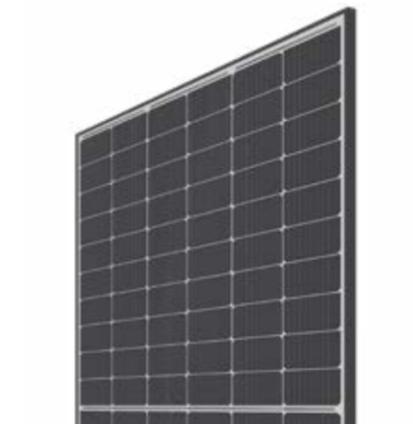


Mono HiR Bifacial HC120 M6 | White
Cell type: n-type HiR M6 (166 mm)
Matrix: 120 half-cut cells
Frame: U30 black



Mono HiR Bifacial M6 HC144 | White
Cell type: n-type HiR M6 (166 mm)
Matrix: 144 half-cut cells
Frame: U30 black

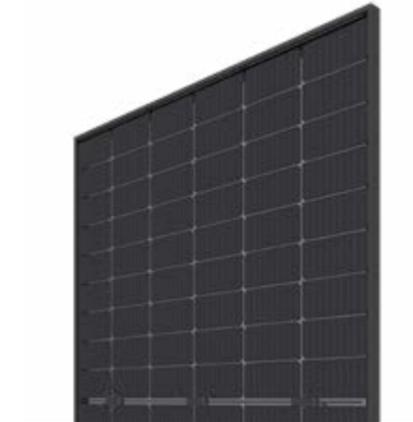

Mono HiR Bifacial M10 HC108 | Full Black optics
Cell type: n-type HiR M10 (182 mm)
Matrix: 108 half-cut cells
Frame: U30 black

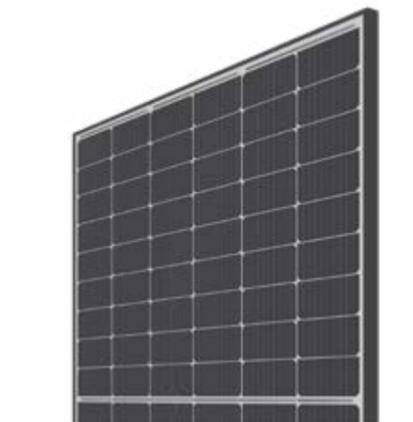

Mono HiR Bifacial M10 HC108 | White
Cell type: n-type HiR M10 (182 mm)
Matrix: 108 half-cut cells
Frame: U30 black

LOCKUP module fixation

The fixation system for framed modules that is fully compatible with components of leading manufacturers.

Two components

- > Rail
- > Clamp

Simple connection


- > Fastening to roof connection by means of screws or cross connectors

Secure fixation


- > Click in the clamp
- > Tighten with screwdriver

High compatibility

- > All frames 30-40 mm
- > Pitched roof and flat roof
- > Compatible with all roof connections from Megasol, Schletter and K2

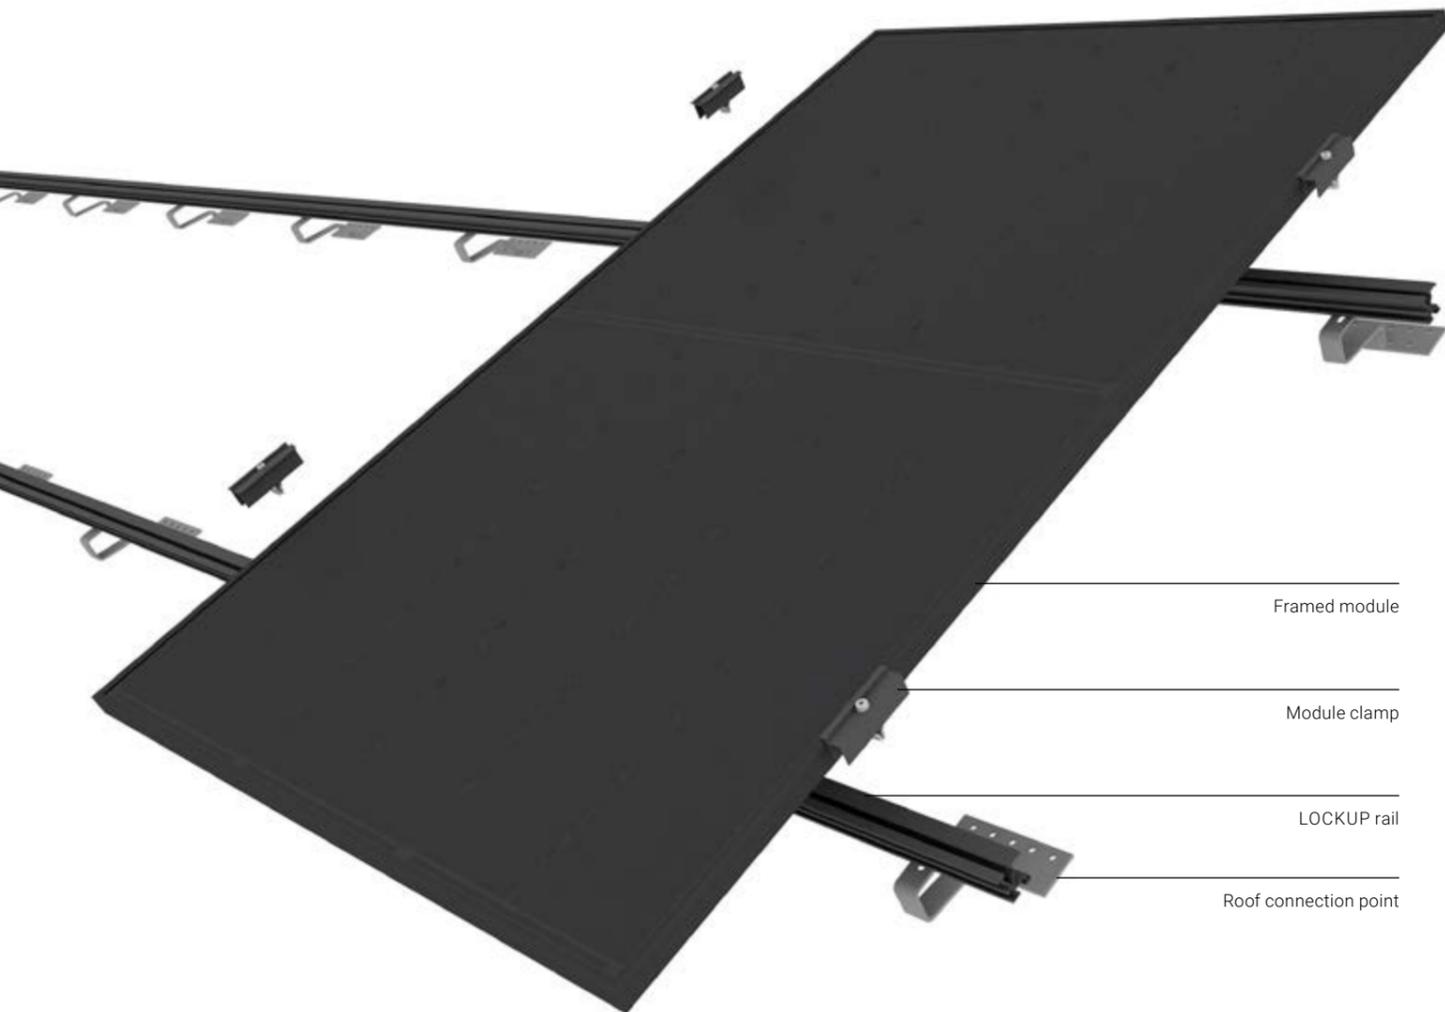

LOCKUP Roof: Pitched roof fixation

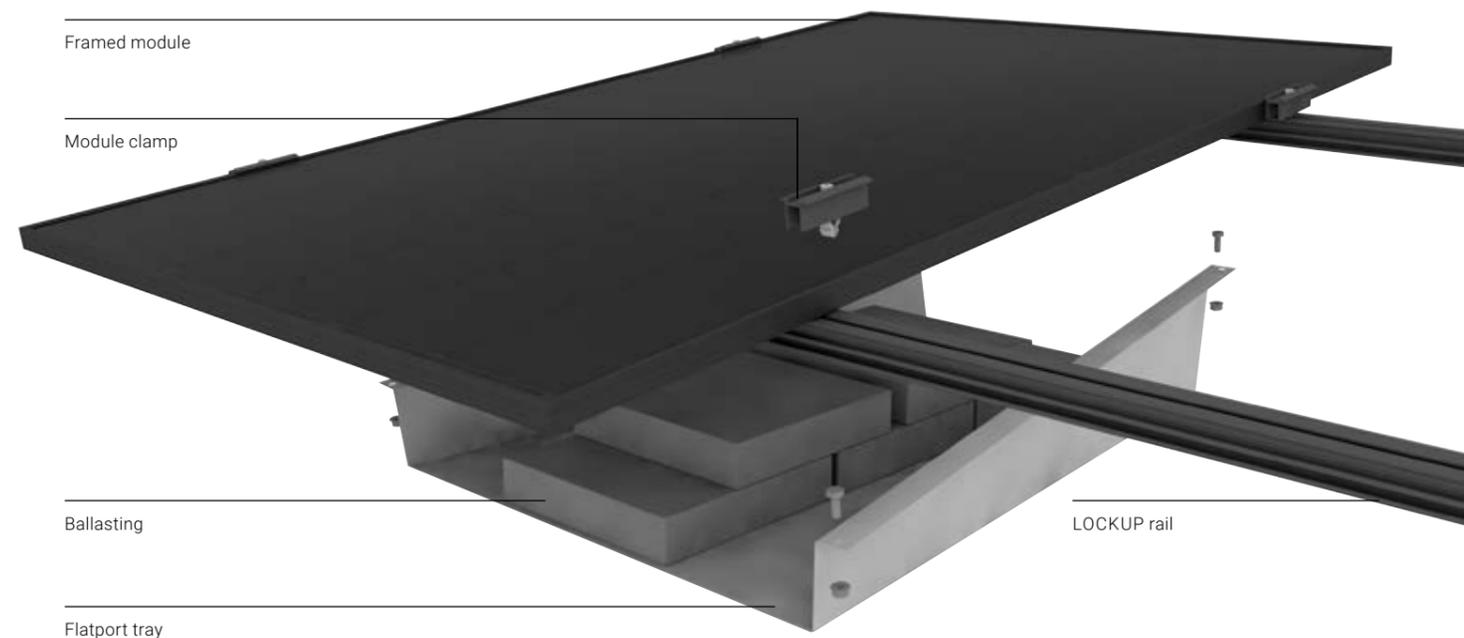

LOCKUP Flatport: Flat roof fixation

LOCKUP components

Rails



3337.0330
LOCKUP rail 6650 mm



3337.0331
LOCKUP connector

Clamps



3231.0212
Module middle clamp
Rapid16, 30-40 mm
black



3231.0217
Module end clamp
Rapid16, 30-40 mm
black



3231.0211
Module middle clamp
Rapid16, 30-40mm
silver



3231.0216
Module end clamp
Rapid16, 30-40mm
silver



3231.0128
Rapid cross connector



▲ Gefco Carport Courgenay | 43'000 m² | 6.84 MWp



LOCKIN inlaying system

The inlaying system for facades and roofs for framed modules with full compatibility with the components of the leading manufacturers.

Two components

- > Rail
- > Locking plate

Simple Connection


- > Direct connection by means of sheet metal adapter
- > Alternatively: fastening to other facade and roof connections by means of cross connectors or screws

Safe inlaying system

- > Insert module diagonally upwards
- > Place vertically and lower
- > Mount end plate
- > No further fixing necessary

High compatibility

- > Facade, pitched roof and flat roof
- > Compatible with all facade and roof connections from Megasol, Schletter and K2
- > Framed modules (30 mm frame)

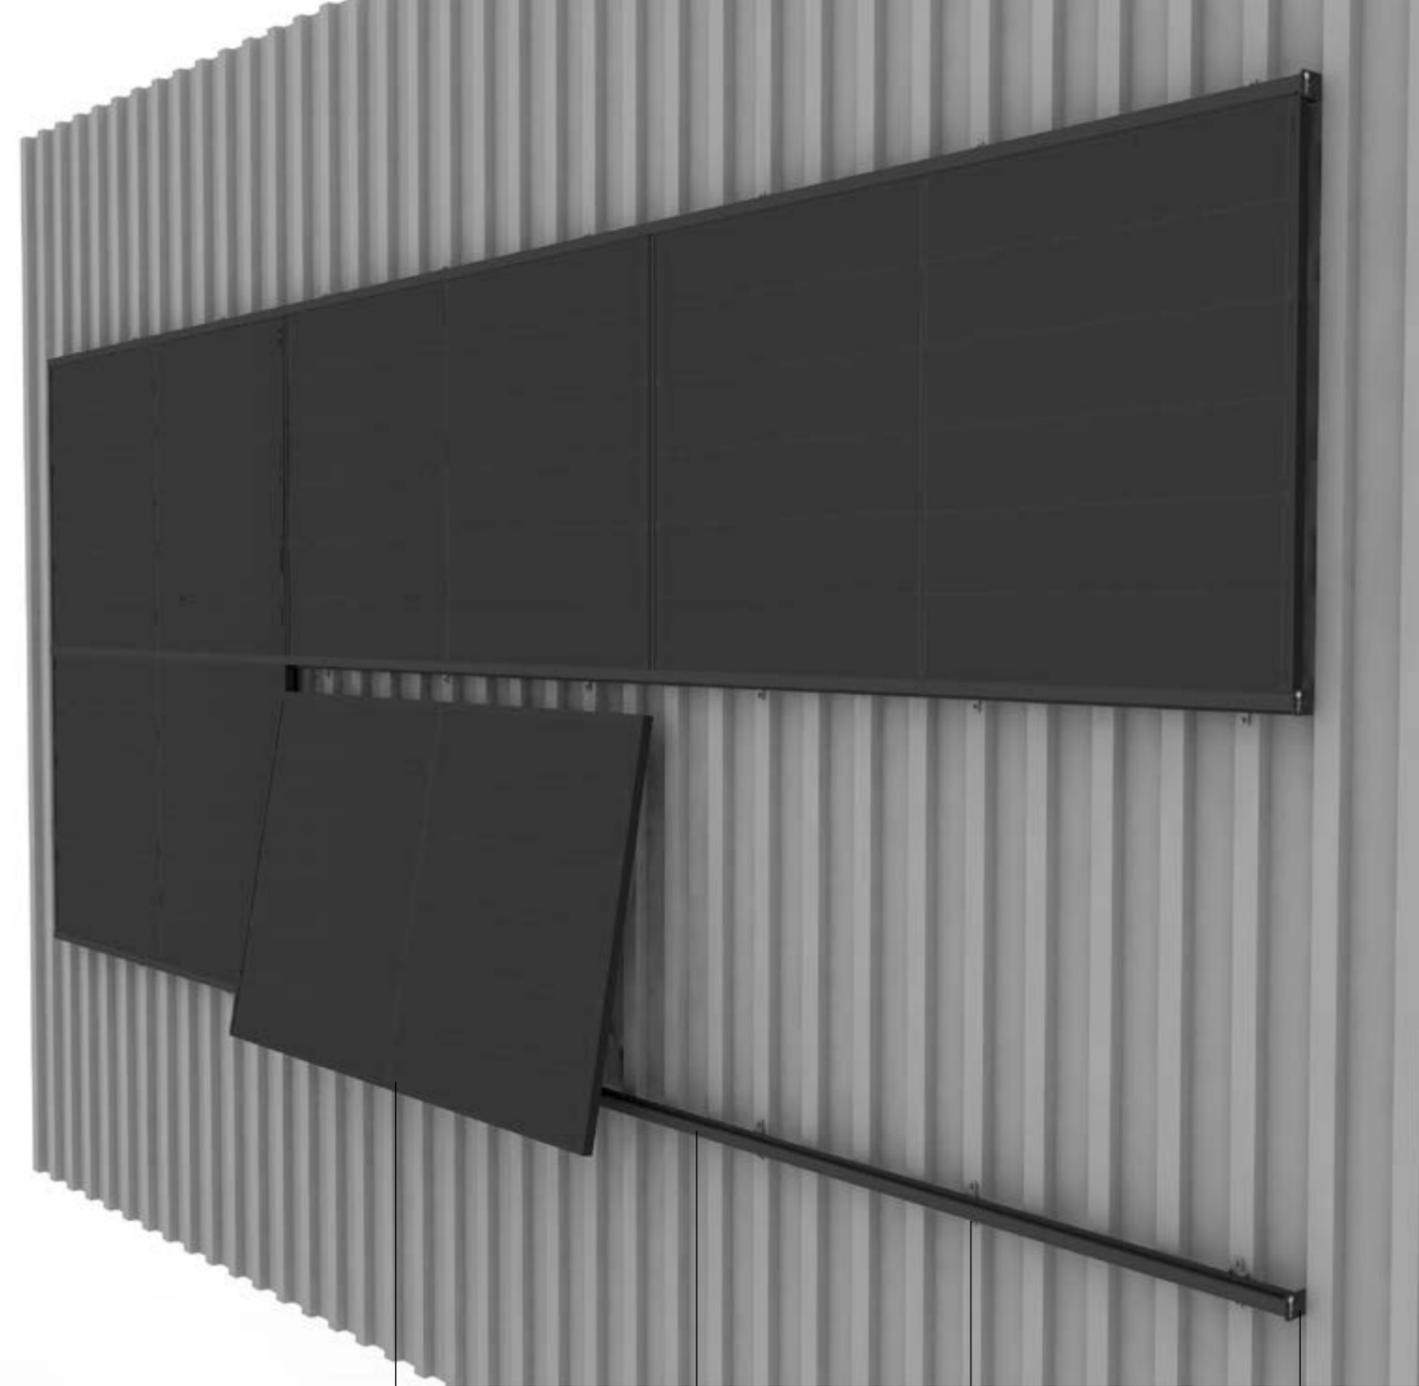

Framed module

LOCKIN rail

Facade fixation

LOCKIN locking plate

Components



3337.0846
LOCKIN rail U30 5325mm



3337.0869
LOCKIN locking plate kit



3337.0871
LOCKIN/LAYIN connector



3337.0345
Sheet adapter kit



Detail: locking plate

Swiss Premium modules

With a service life of over 50 years our *Swiss Made* glass-glass solar modules are particularly interesting for institutional investors.

Swiss quality

- > 35 years linear performance warranty
- > 15 years product warranty
- > Made in Deitingen, Switzerland



Profitable investments

- > Service life of more than 50 years
- > Highest yields
- > Lowest watt price per warranty year




Sustainable production

- > Made with renewable power sources
- > Energetic amortisation under 2 years
- > Seamless traceability of all materials



Wide range of applications

- > Cell technologies
- > Power classes
- > Optics




Frameless glass-glass module | 20

LAYUP fixation | 24




Module types


Frameless Swiss Premium modules

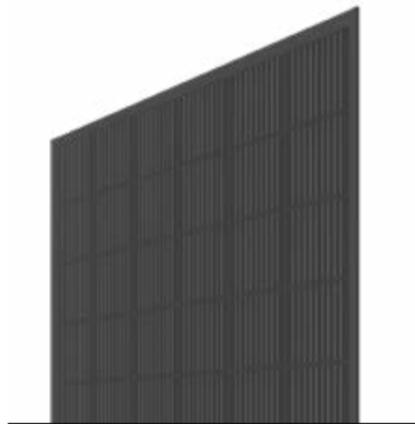

Swiss Premium GG3 | Black
2x 3.2mm solar glass
Frameless

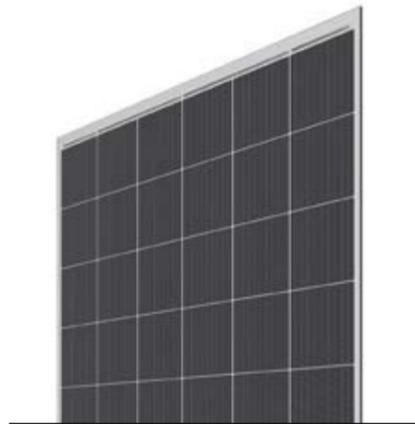

Swiss Premium GG3 | White
2x 3.2mm solar glass
Frameless

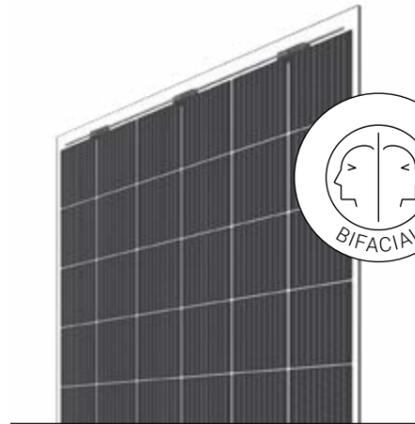

Swiss Premium GG3 | Translucent
2x 3.2mm solar glass
Frameless



Technical specifications

Laminate structure: Glass-glass

Megasol Cell technologies: Mono HiR / Mono HiR RearCon

Cell size: 158.75mm (G1) / 166mm (M6) / 182mm (M10) / 210mm (G12)

Cell geometry: Full-square / Half-cut / Triple-cut / Custom

Frame: Frameless

Encapsulation material: EVA / PVB / POE

Glass thickness per pane: 2 - 12 mm

Hail protection: Protection class 5 (hailstone size 50 mm)


Fire safety classification: B - s1, d0 according to European fire protection standard EN 13501-1. The building element is considered non-combustible material in terms of cantonal fire insurance.

Suitable mounting systems

- > LAYUP Fixation 24
- > LAYIN Inlaying system 28

Bifacial: power from reflections

- > Double sided active cells
- > Additional yields depend on the installation situation and the albedo (reflectivity) of the substrate

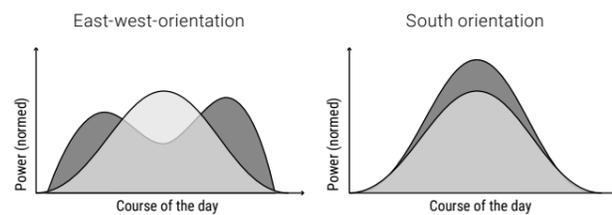

In east-west orientations, the rear produces most when the sun is flat. South facing bifacial plants generate their additional yield classically during the midday hours.

Potential bifacial gain

Low reflecting surface (e.g. grass, brick)	5-15%
Well reflecting surface (e.g. sand, bright gravel or paint)	15-25%
Highly reflecting surface (e.g. ice, snow)	25-35%



▲ Vortex Campus in Lausanne | High-performance modules with LOCKUP Flatport | 330 kWp | Image: Université de Lausanne

LAYUP fixation

The mounting system for frameless glass-glass modules (monofacial or bifacial) that is fully compatible with components of leading manufacturers.

Versatile application

- > Monofacial or bifacial glass-glass modules
- > Pitched roof, flat roof and facade
- > Compatible with all roof connection points from Megasol, Schletter and K2

Elegant look


- > Flush-mounted installation
- > Without protruding frames (CleanFrame effect)

Three components


- > LAYUP rail (black / classic aluminium)
- > LAYUP clamps (black / classic aluminium)
- > Cross connector or screw

Secure fixation

- > Connection with screws or cross connectors
- > Placed on the rail and secured with clamps
- > High stability thanks to large contact surface

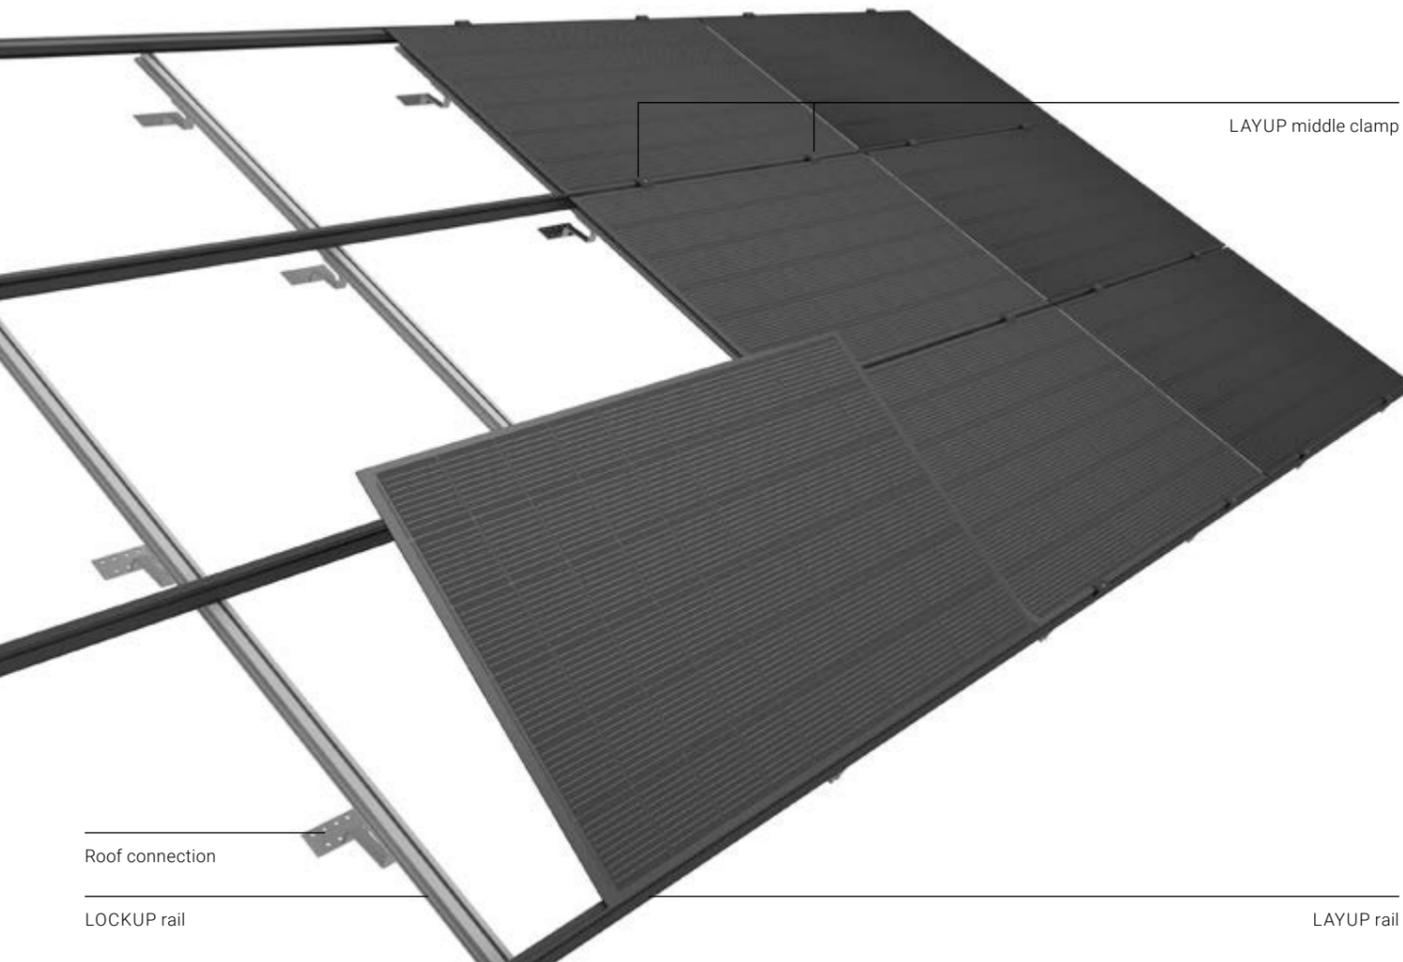


LAYUP Roof: Fixation on pitched roofs

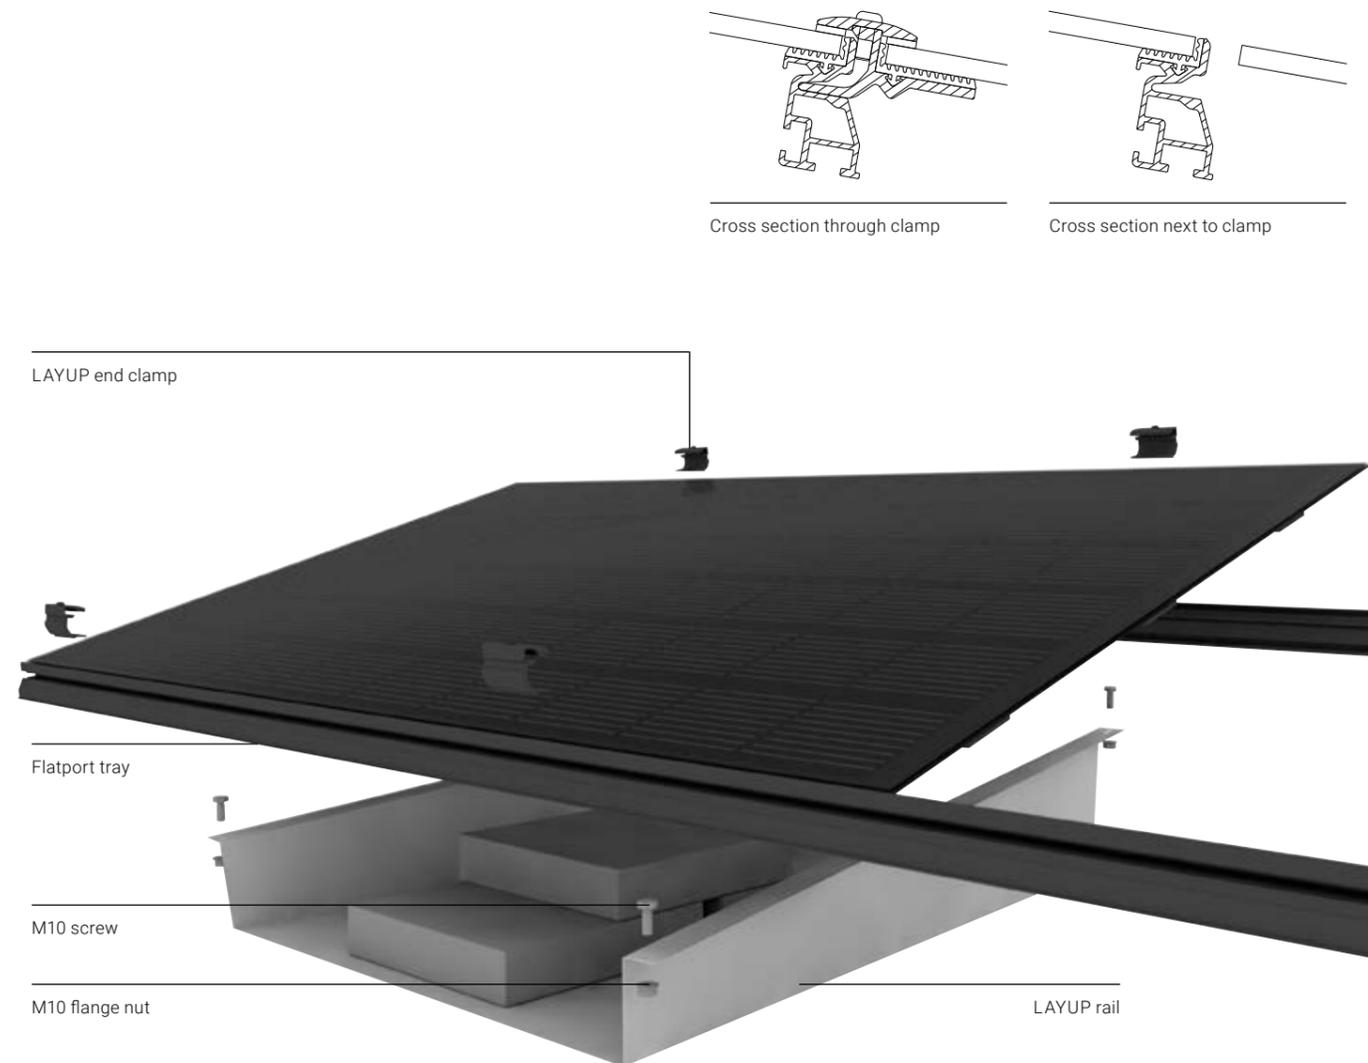

LAYUP Flatport: Flat roof fixation

LAYUP components

Rails

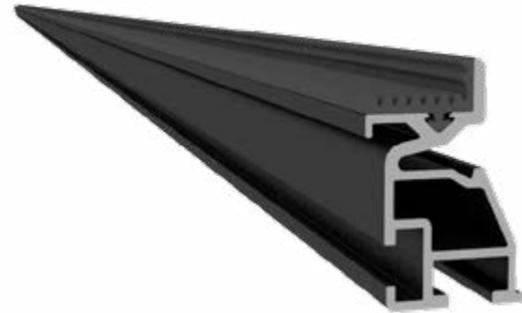

3337.0318
LAYUP rail 6700 mm black



3337.0319
LAYUP rail 6700 mm
silver



3337.0310
LAYUP rail connector
kit with screws

Clamps



3337.0308
LAYUP middle clamp
kit black



3337.0301
LAYUP end clamp
black



3337.0314
LAYUP middle clamp
kit silver



3337.0309
LAYUP end clamp
silver





LAYIN Inlaying system

The inlaying system for facades and roofs for frameless modules with full compatibility with the components of the leading manufacturers.

Two components

- > Rail
- > Locking plate

Simple Connection


- > Direct connection by means of sheet metal adapter
- > Alternatively: fastening to other facade and roof connections by means of cross connectors or screws

Safe inlaying system

- > Insert module diagonally upwards
- > Place vertically and lower
- > Mount end plate
- > No further fixing necessary

High compatibility

- > Facade, pitched roof and flat roof
- > Compatible with all facade and roof connections from Megasol, Schletter and K2
- > Frameless modules

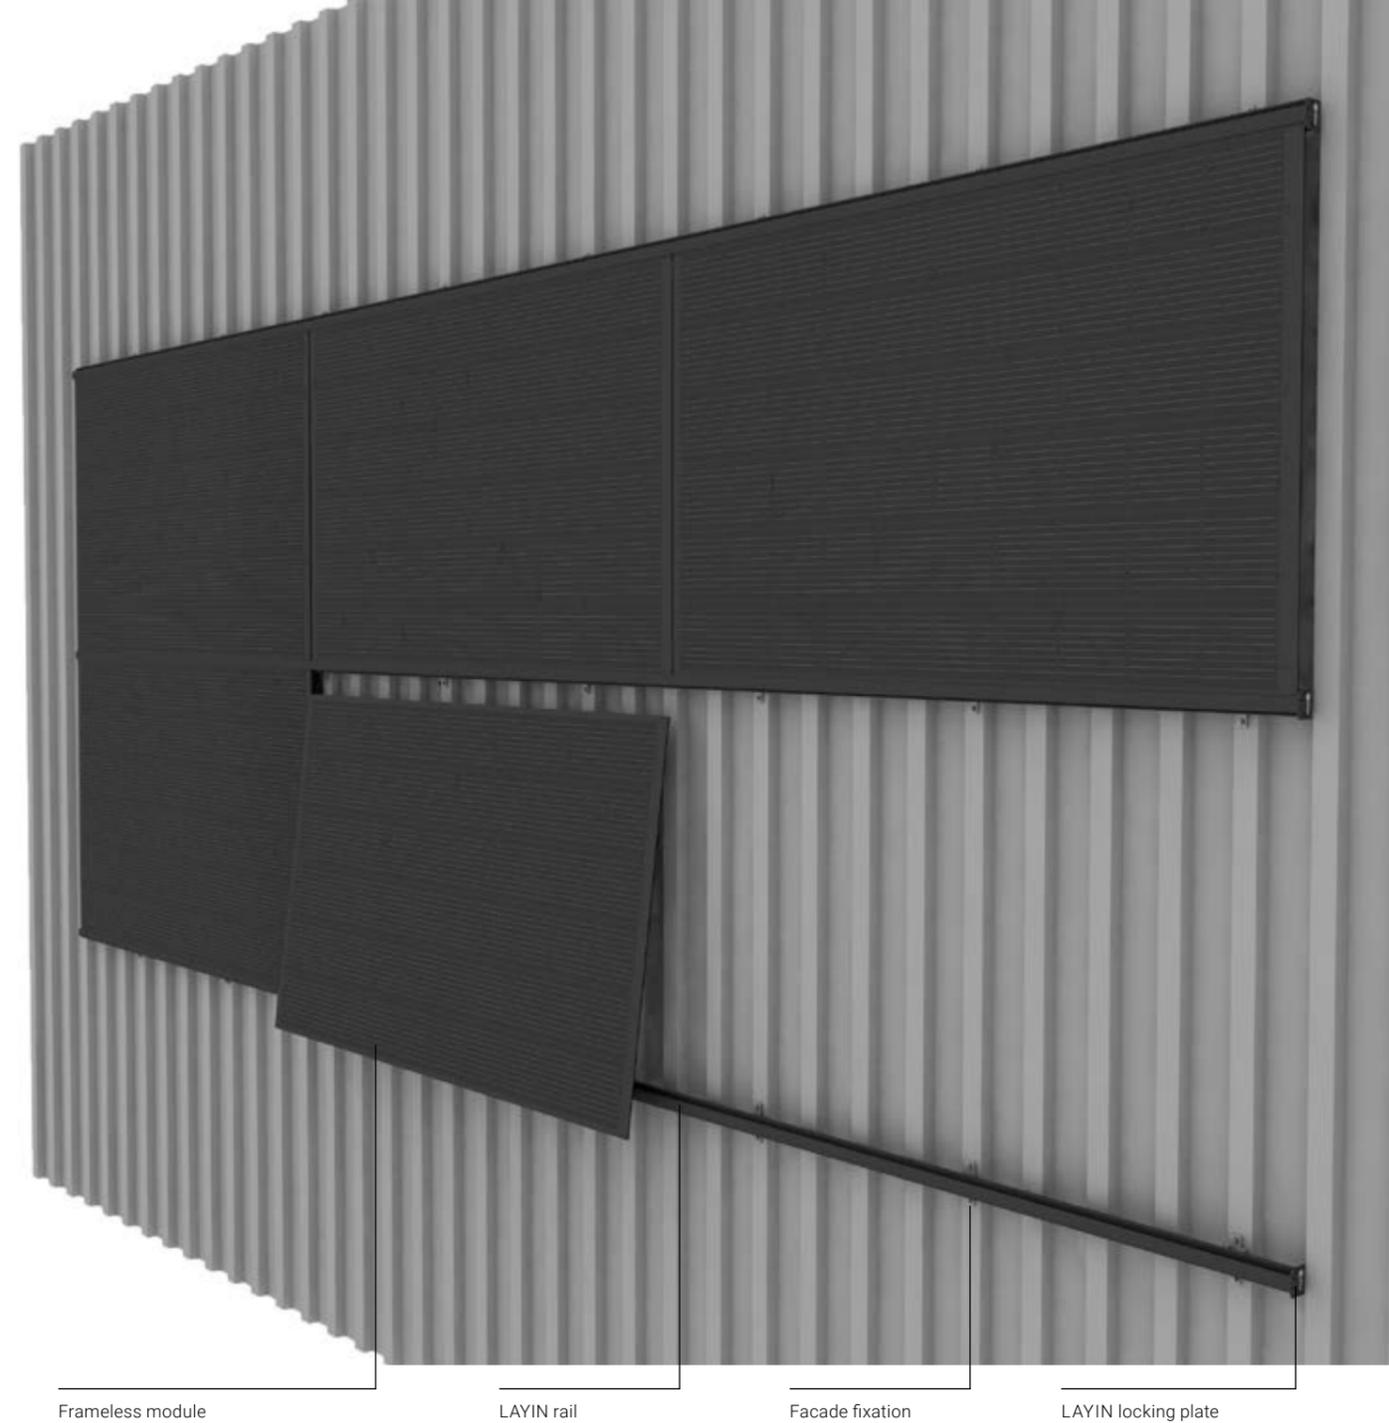

Components



3337.0853
LAYIN rail GG 5900mm



3337.0870
LAYIN locking plate kit



3337.0871
LOCKIN/LAYIN Connector



3337.0345
Sheet adapter kit



Detail: Locking plate

Connecting to pitched roofs


The well-elaborate connection points for pitched roofs can be perfectly combined with LOCKUP, LOCKIN, LAYUP and LAYIN module fixations.

Wide range of applications

- > The right solution for every roof covering
- > For different static load requirements

Simple combination

- > Compatible with LOCKUP, LOCKIN, LAYUP and LAYIN module fixations
- > Cross connectors or screws

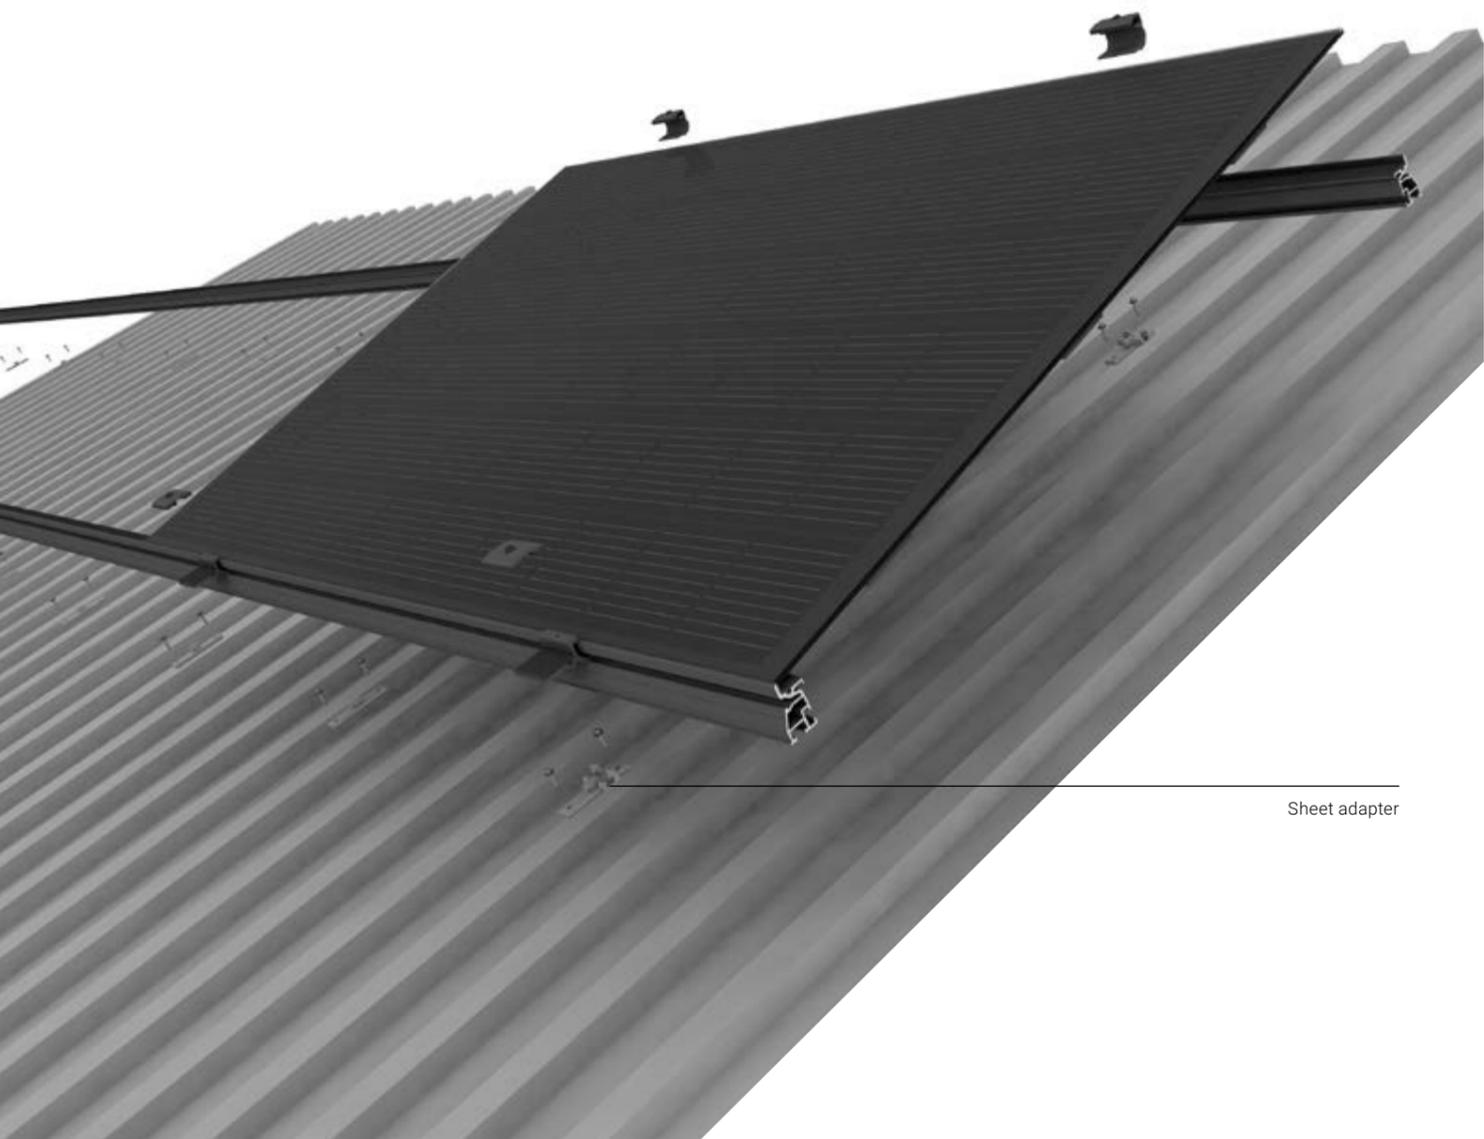

Sheet adapter

Components



Classic tile



Seam metal



Trapezoidal sheet



Corrugated roof



3231.0029
Roof hook Rapid2+ Max



3333.0046
Clamp 504 AL KK for seam metal



3337.0345
Sheet adapter kit



3231.0179
Fixation kit for corrugated roof
M12x300 KlickTop



3231.0036
Roof hook Rapid2+ MaxV



3337.0329
Stopper



Plain tile



Fibre cement



Prefa



3231.0024
Fixation kit for plain tile



3231.0010
Roof hook for fibre cement/Prefa

Connecting to flat roofs

The easy-to-mount *Flatport* trays for flat roofs are the ideal base for LOCKUP and LAYUP module fixations.

Quick and gentle installation

- > Upside-down procedure
- > No punctual load on the roof membrane

Simple ballasting

- > Gravel or slabs
- > Ballasting plan on request

All flat roof coverings

- > Gravel / granulate
- > Vegetated / bitumen

High longevity

- > Corrosion resistant alloy
- > 10 years material warranty

Simple combination

- > Compatible with LOCKUP and LAYUP module fixations
- > Quick fastening with screws

Components



3337.0175
Flatport Advanced 6° 997.5



3231.0130
Hexagon screw M10x25




3231.0040 Flange nut M10
with locking teeth



1 Place the LOCKUP rail on Megasol trestles and insert M10x25 hexagon screws into the rail.



2 Place the Flatport trays upside down on the rails and tighten them with M10 flange nuts.

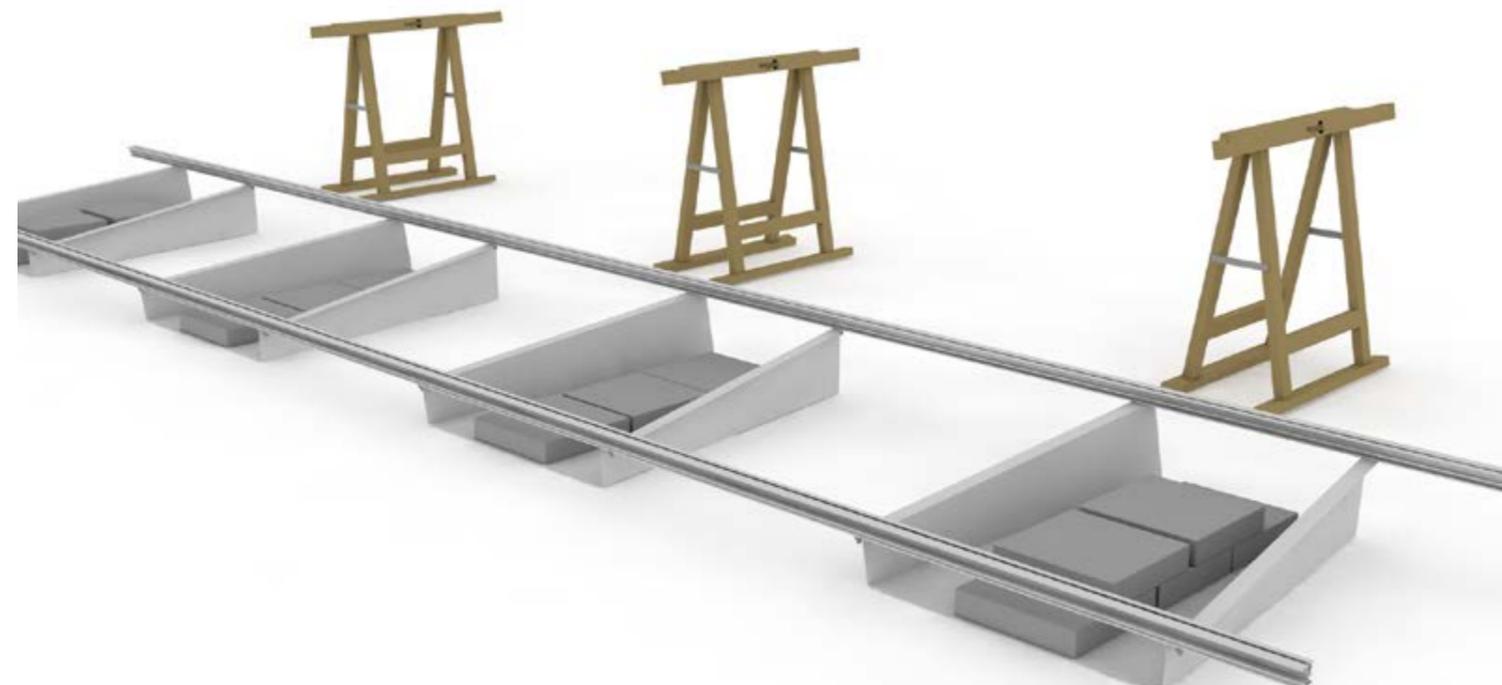

3 Turn the trays over with the rails, align them on the surface and ballast them.

Made in Deitingen



Development

We are committed to technological leadership in the field of all-in-one systems. Following this principle, we continuously drive the development forward. Megasol solar modules and mounting systems as well as our production processes are constantly analyzed and optimized. Our engineers, programmers and electrotechnicians closely cooperate to design and develop new products and the processes required to manufacture them.

Our test and research centre in Deitingen, Switzerland pools the entire expertise from planners and installers and shapes the development and advancement of new and existing products.

Optimizing performance

The nano-coated antireflective solar glass used for all products conducts the maximum amount of sunlight to the solar cells. Thanks to state-of-the-art spectral optimization, Megasol solar modules perform up to 15% better than customary modules under cloudy conditions and during dusk or dawn.

In-house test centre

Especially in high alpine environments, extreme heat or cold and the impact of snow and wind are particularly challenging for solar modules. The standard IEC test procedures do not account for these conditions.

Our test procedures are different – they exceed industry standards by far. An example: The IEC requires damp heat test procedures to cover 1'000 hours. Megasol increases this value by a factor of 10 to 10'000 hours.

At our Deitingen production site, we test: Damp-heat, shock freeze, UV lifetime, dynamic load, Overpressure and thermal cycle. Only top-quality materials that pass all tests without reservation are used to produce Megasol modules.

Certifications

The manufacturing processes are TÜV-tested and run in accordance with EN/IEC and ANSI/UL standards.

In-line testing

One production line is designed for medium-sized series, while the other is used to manufacture modules in a customer-specific design. Starting with precise controls of all semi-finished products, each step in the manufacturing process is subject to several controls.

Electroluminescence tests (3 times) as well as technical and optical controls accompany the entire manufacturing process up to the final flash test.

Traceability

All data from production can be viewed electronically at any time. This also includes information on the materials used, which can be traced back seamlessly to the raw material batch. Our high-performance solar cells consist of high-purity silicon – free of cadmium, rare earths and heavy metals.

Recycling

Our commitment with the Swiss foundation SENS and the European PV Cycle enables the reuse of almost 100% of the used material.

Top Brand PV

Every year, the market research institute EUPD Research identifies the most successful and strongest brands on the PV market. For the installers surveyed, Megasol ranks consistently among the most popular module manufacturers.

Megasol is an award-winning company. Many Swiss and European solar prizes and architecture and design awards testify to the trust placed in Megasol.

Services

Project support:

- > Consulting / training
- > Detailed design options
- > Grid layout
- > Connection details / interfaces
- > String / inverter dimensioning
- > After Sales

Formalities:

- > EIV, ESTI, EEA

Development:

- > Design / colour
- > Samples / mock-ups
- > Customized mounting solutions
- > Integration of storage solutions, energy management, charging infrastructure for e-mobility

Megasol Energy Ltd.

Industriestrasse 3
CH-4543 Deitingen

+41 62 919 90 90
info@megasol.ch
www.megasol.ch

© Megasol Energy Ltd.

ROOFTOP-EN-V5

Subject to errors and technical modifications

▼ Cleantech Businesspark in Deitingen

